



Snowdragon Industrial Co.,Ltd

DATA SHEET


MODEL No : SD-FFGB3F4

ENG. No:


Description:

- 5mm High Flux RGB led
- Lens Color: Water Clear
- Emitting Color: RGB
- Viewing Angle :90°
- With Stopper

PREPARED BY	CHECKED BY	APPROVED BY
CUSTOMER APPROVED SIGNATURES		

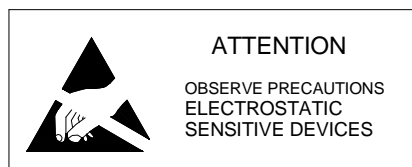

Model No.	SD-FFGB3F4
Revision:	

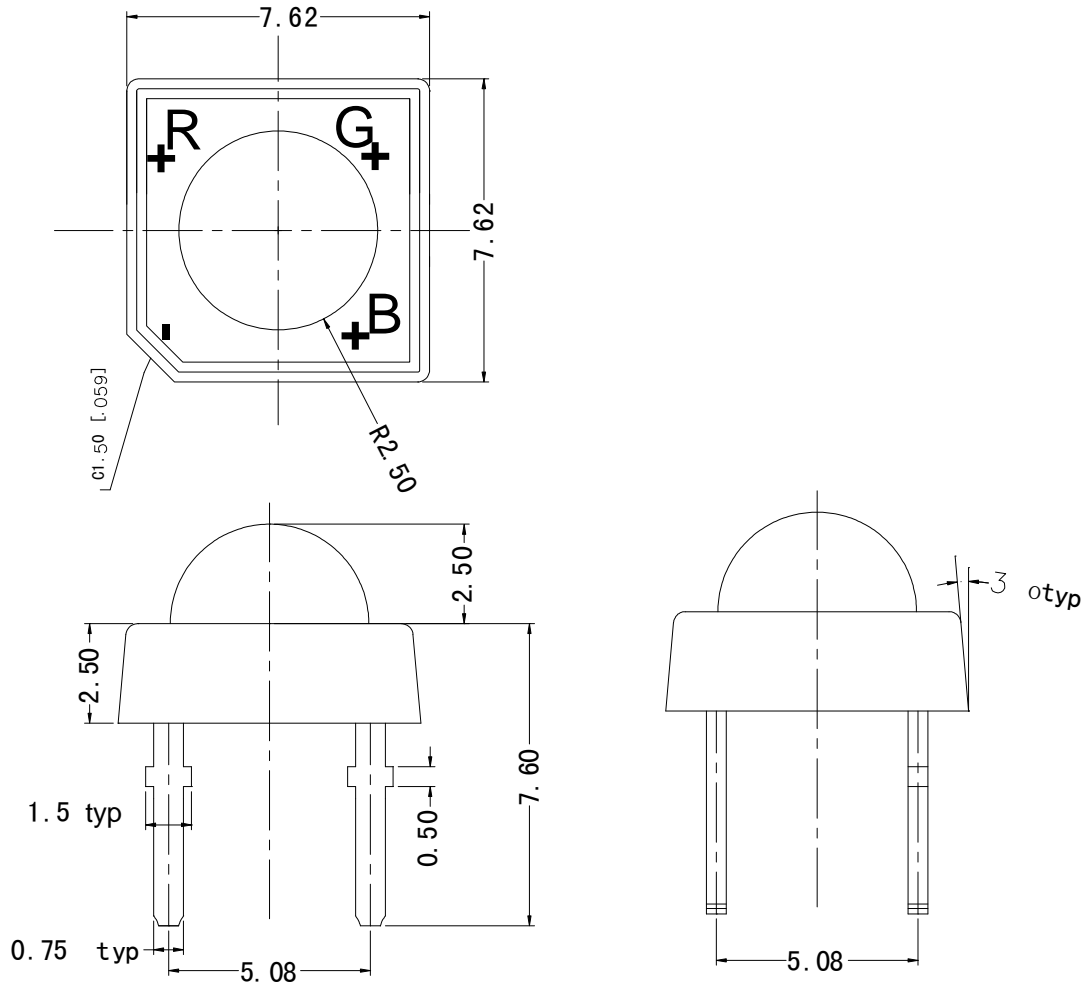

- Note:
1. All Dimensions are in millimeters
 2. Tolerance is $\pm 0.25\text{mm}$ ($0.010''$) Unless otherwise specified.
 3. Protruded resin under flange is 1.5mm ($0.59''$) max.
 4. This product to static electricity sensitive, Usage the hour please watch for the electricity aegis.

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Red	Green	blue	Unit
Power Dissipation	P _D	80	100	100	mW
Continuous Forward Current	I _F	30	30	30	mA
Peak Forward Current*1	I _{FP}	100	100	100	mA
Reverse Voltage	V _R	5			V
Operating Temperature Range	Topr	-40°C to+80°C			
Storage Temperature Range	Tstg	-25°C to+100°C			
Lead Soldering Temperature 【3mm From Body】	Tsol	260°C For 5 Seconds			

*1 : Peak Forward Current 1/10 Duty Cycle,0.1ms Pulse Width

Electrical Optical Characteristics at Ta=25°C


Parameter	Symbol	Min	Typ	Max	Unit	Condition	
Forward Voltage	VF	R	1.9	2.1	2.3	V	IF=20mA
		G	2.9	3.1	3.3		
		B	2.9	3.1	3.3		
Luminous Intensity	IV	R	600	----	800	mcd	IF=20mA
		G	2000	----	2500		
		B	800	---	1000		
Dominant Wavelength	λd	R	620	---	630	nm	IF=20mA
		G	520	---	530		
		B	465	---	475		
Reverse Current	IR	/	/	5	μA	VR=5V	
Viewing Angle	2θ1/2	/	90	/	deg	IF=20mA	

Note.


1. 2θ1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 10

Typical Electro-Optical Characteristics Curves


Relative Luminous Intensity vs Forward Current, $T_{Ambient}=25^{\circ}C$

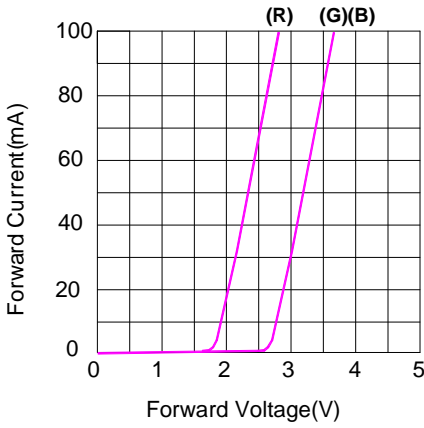


Relative Luminous Intensity vs Forward Current, $T_{Ambient}=25^{\circ}C$

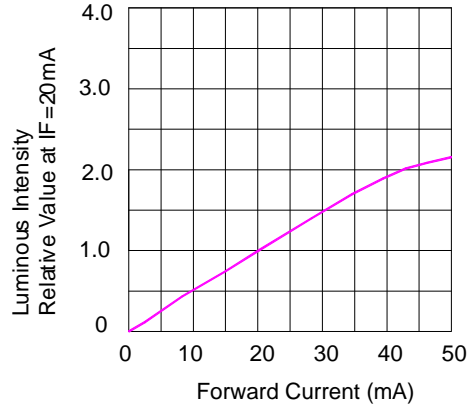



Forward Current Derating Curve, Derating based on $T_{jMAX}=85^{\circ}C$

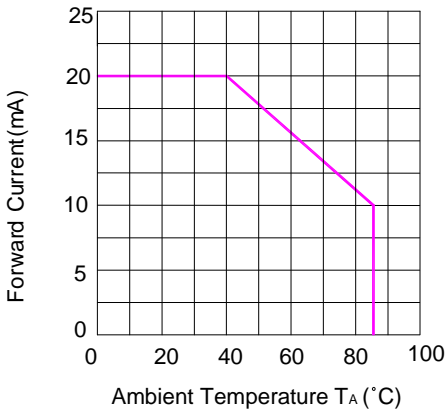

Luminous Intensity VS Ambient Temperature

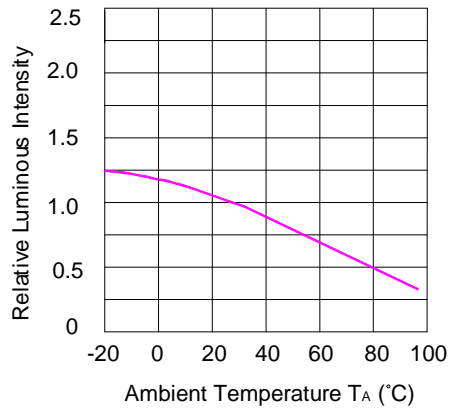

Relative Spectral Distribution, $I_F=80mA$, $T_{Ambient}=25^{\circ}C$

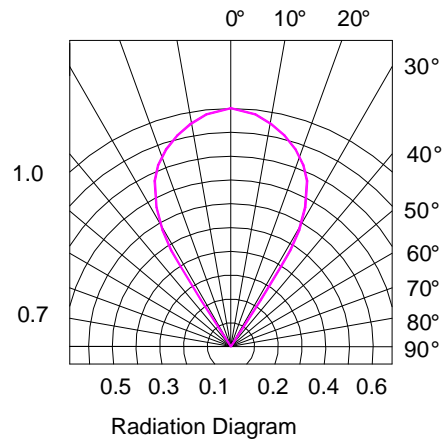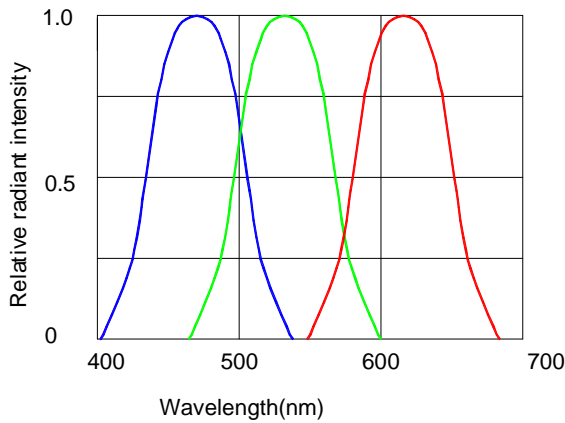

LED Lamp Reliability test standard

Type	Test Item	REF. Standard	Test conditions		Note	Number of Damaged
			Binary / Trinary Chip	Quaternary Chip		
Environments Sequence	Temperature Cycle	JIS C7021 (1977)A4	-20°C~25°C~80°C~25°C 30min,5min,30min,5min	-40°C~25°C~100°C~25°C 30min,5min,30min,5min	100 cycles	0/100
	Thermal shock	MIL-STD-202G	-20°C~80°C 30min, 30min	-40°C~100°C 30min, 30min	100 cycles	0/100
	High Temperature Storage(*)	JIS C7021 (1977)B10	Ta=80°C	Ta=100°C	1000Hrs	0/100
	Low Temperature Storage	JIS C7021 (1977)B12	Ta=-30°C	Ta=-40°C	1000Hrs	0/100
Operation Sequence	Life test	JIS C7035 (1985)	Ta=25°C If=25mA	Ta=25°C If=25mA	1000Hrs	0/100
	High humidity Heat life test	-----	60°C RH=90% If=20mA	60°C RH=90% If=20mA	500Hrs	0/100
	Low temperature Life test	-----	Ta=-20°C If=20mA	Ta=-30°C If=20mA	1000Hrs	0/100
Destructive Sequence	Resistance to solderingHeat	JIS C7021 (1977)A11	Tsol=260±5°C ,10sec. (3mm from the base of the epoxy bulb)		1 time	0/20
	Solder ability	JIS C7021 (1977)A2	Tsol=235±5°C ,5sec. (using flux)		1 time (over95%)	0/20
	Lead Pull/Bend Test	JIS C7021 (1977)A11	Load 2.5N(0.25kgf) 0°C~90°C~0°C;Bend 3times		3 time	0/10
ESD Test	ESD TEST	AEC (Q101002)	Human body model 1000v		-----	0/10

Items marked with * are selective.

Failure Criteria

Item	Symbol	Test Condition	Criteria for Judgment	
			min	Max
Forward Voltage	VF	IF = 20 mA	-----	Initial Data x 1.1
Reverse Current	IR	VR = 5 V	-----	100 A
Luminous Flux/Intensity	/IV	IF = 20 mA	Initial Data x 0.7 (Total degradation) Initial Data x 0.5 (Single lamp degradation)	